

UTM TENSILE REPORT — UTM_Test_20260826_123524


DIC gauge strain (ENGINEERING: $\Delta L/L_0$) · engineering stress (F/A_0) · anchor self-calibration




TEST SETTINGS

Specimen	UTM_Test_20260826_123524
DIC mode	Black
Preload target	20 N
Test speed	0.100 mm/s
Cross-section	80 mm ²
Gauge length L ₀	45 mm
Infill (label)	100 %
Force calib	sc -0.0065 / off 43.264
Comment	—
Test date	2026-08-26 12:30:26
Duration	308.7 s

Stress-strain

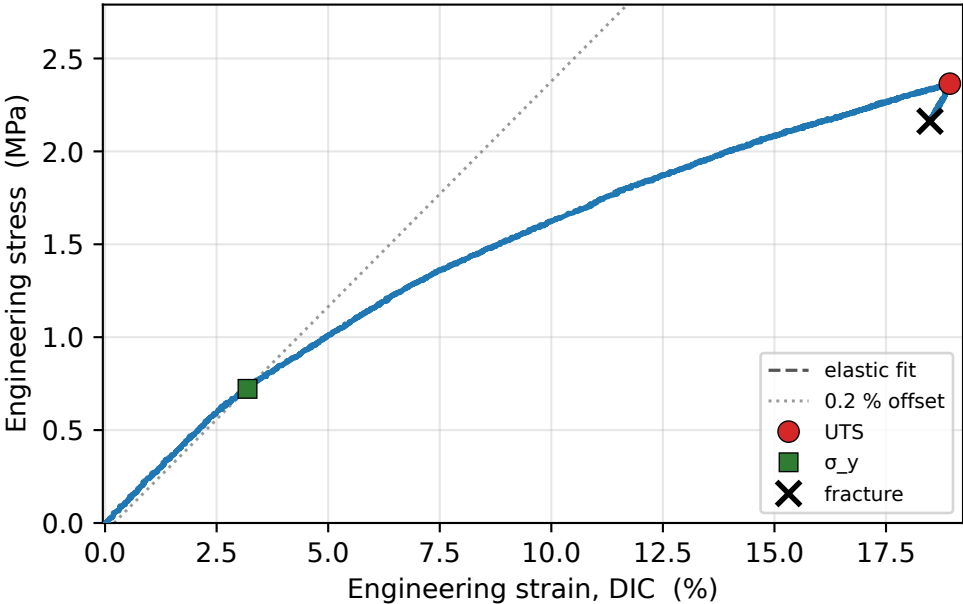

Load vs time

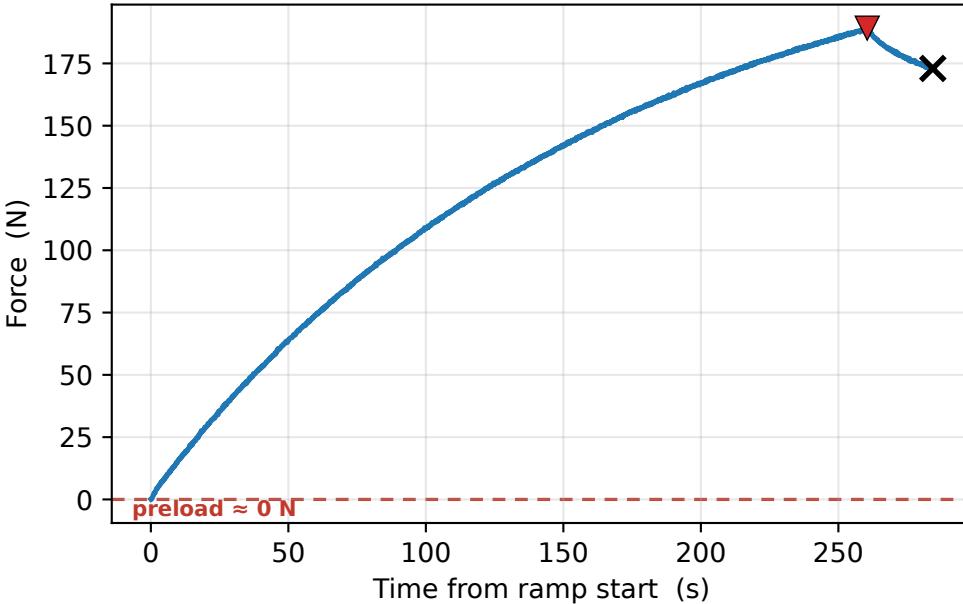


VALIDATION vs REFERENCES

prop	meas	Chacón	E-PLA k
UTS	2.4	32-60 low	×24.53
σ_y	0.7	30-50 low	×80.34
E	0.0	3-5.5 low	×118.32
ϵ_f	18.5 %	(range 3-7 %)	×0.43

⚠ strength outside journal range

Stress vs crosshead

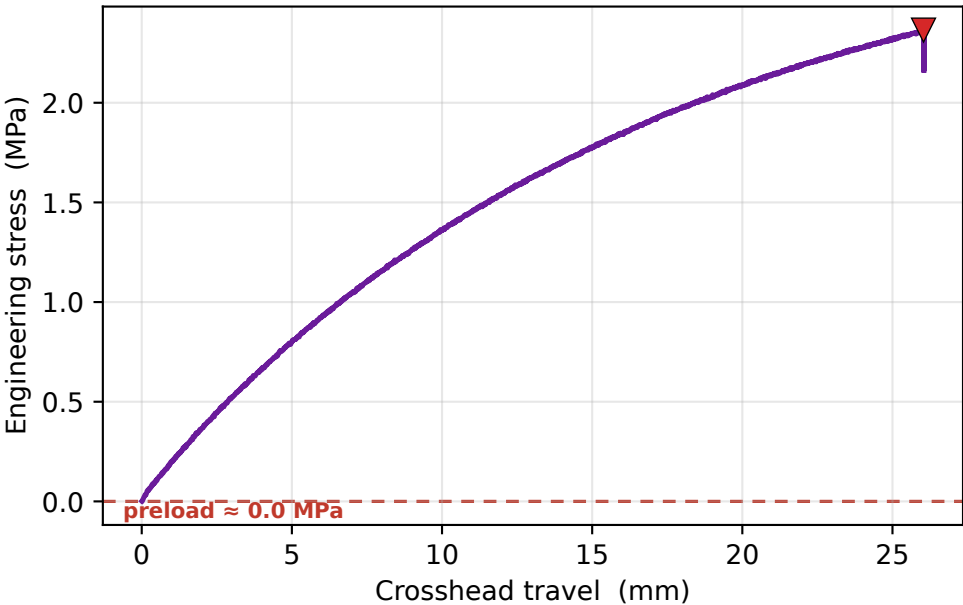

DIC strain vs crosshead — the compliance gap

