

UTM TENSILE REPORT — UTM_Test_20260824_184604


DIC gauge strain (ENGINEERING: $\Delta L/L_0$) · engineering stress (F/A₀) · anchor self-calibration

2.0 MPa UTS	0.9 MPa Yield σ_y	0.02 GPa Modulus E	11.7 % Failure ϵ_f	135 kJ/m³ Toughness	0 N Preload anchor
-----------------------	------------------------------------	------------------------------	---------------------------------------	--	------------------------------


TEST SETTINGS

Specimen	UTM_Test_20260824_184604
DIC mode	Black
Preload target	20 N
Test speed	0.100 mm/s
Cross-section	80 mm ²
Gauge length L ₀	80 mm
Infill (label)	100 %
Force calib	sc -0.0065 / off 36.959
Comment	—
Test date	2026-08-24 18:42:25
Duration	225.4 s

Stress-strain

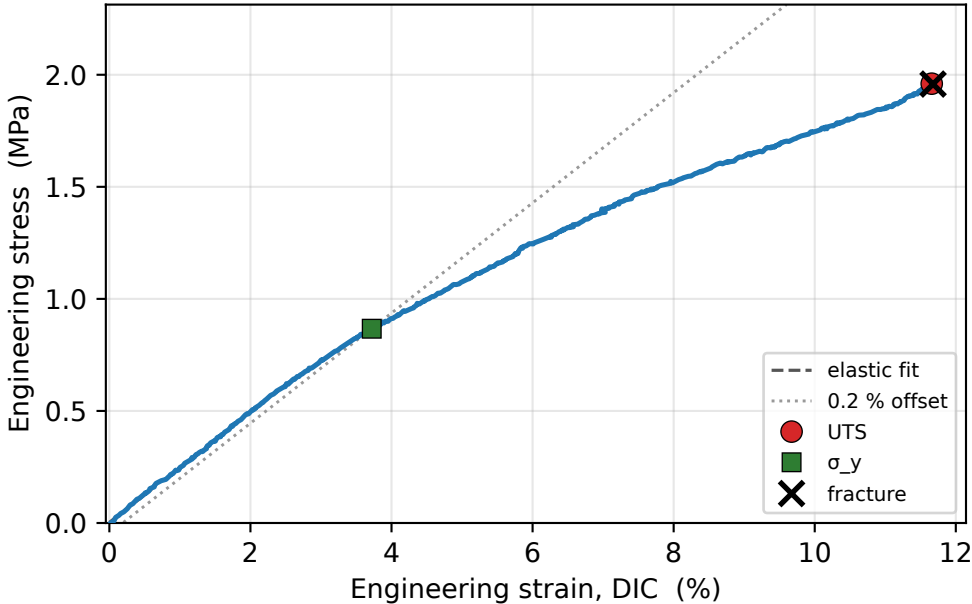

Load vs time

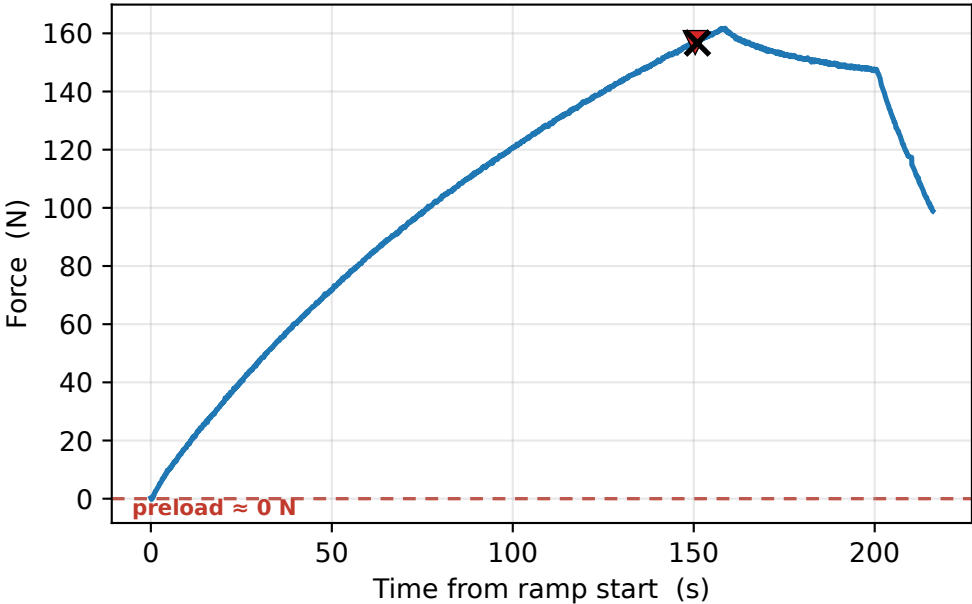


VALIDATION vs REFERENCES

prop	meas	Chacón	E-PLA k
UTS	2.0	32-60 low	×29.59
σ_y	0.9	30-50 low	×66.91
E	0.0	3-5.5 low	×116.75
ϵ_f	11.7 %	(range 3-7 %)	×0.69

⚠ strength outside journal range

Stress vs crosshead

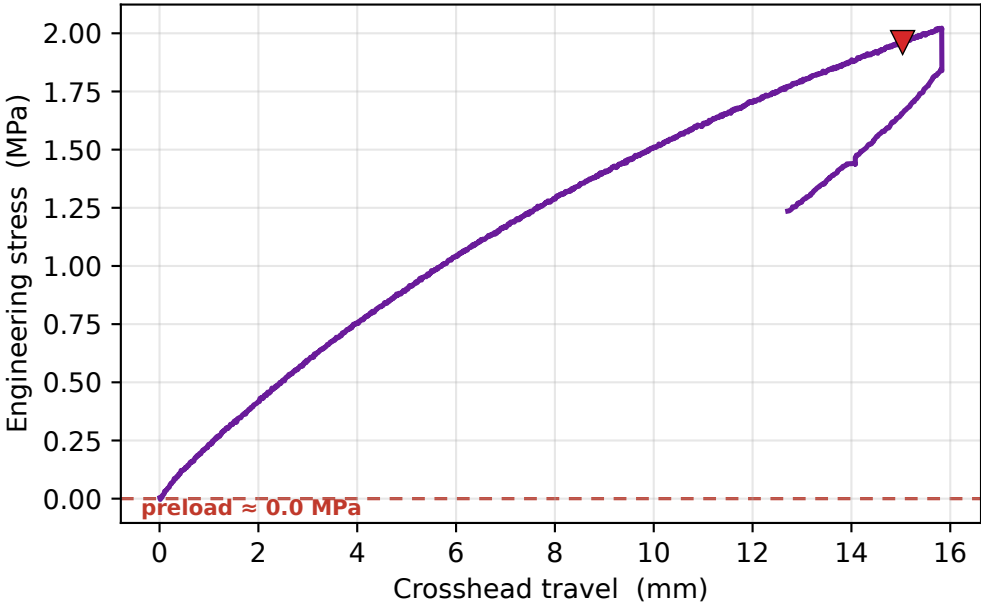

DIC strain vs crosshead — the compliance gap

